




**Standard Suspended Ceiling Install Procedure**

\*Commercial tile grid (Supplied by others) must be supported every 4' in each directions and installed prior to Troy Tile install.

1. Starting from back of range proceeding to trap, gently place each Troy Tile into the suspended grid. Starting with one  $23 \frac{5}{8}$ " side first and adjusting tile in place until secured on grid framing.
2. Once a single row of Troy Tile has been installed, three (3) layers of 6" Troy Wool will be placed on top of tile and grid framing. Do not proceed to next row until all 6" Wool covers the entire designated surface.
3. Proceed with install until all of the designated Safety Ceiling has been covered with treatment.

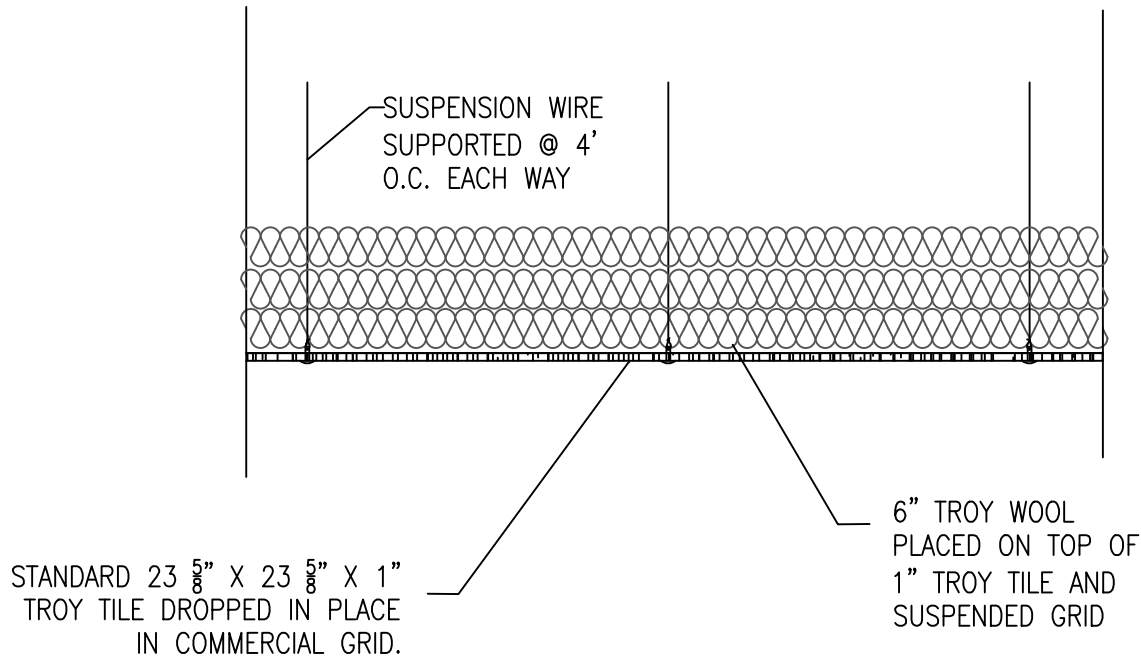

NOTE:  
COMMERCIAL 2'x2' TILE GRID (SUPPLIED BY OTHERS). GRID MUST BE SUPPORTED EVERY 4' IN EACH DIRECTION. NRC VALUE > 1.05

**1** CAC 42 SUSPENDED ABSORPTION CEILING  
STANDARD COMMERCIAL GRADE 2X2 TILE  
A - 4 NOT TO SCALE

CAC 42 SUSPENDED CEILING DETAIL

REVISIONS:

DRAWN BY: TCB
DATE: 7-20-22
SCALE: AS NOTED

**SUSPENDED  
CEILING  
DETAIL**

SHEET #  
**A - 4**